


Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,9 - 7,0
Introduced thermal power (at max)	kW	7,9
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	90,0 - 89,0
Heating surface (at min-at max)	m ²	30,6 - 73,9
CO ₂ (min-max)	%	7,8 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	220 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	20 - 15
Combustible Pellet	mm	ø6 L3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,60 - 1,70
Autonomy (at min-at max)	h	20 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption (at max)	W	350
Operating electrical absorption (at max)	W	74
Chimney flue depression (at min-at max)	Pa	2 - 11
Mass of smoke (at min-at max)	g/sec	3,0 - 5,0
Exhaust fumes temperature (at min-at max)	°C	164 - 239
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

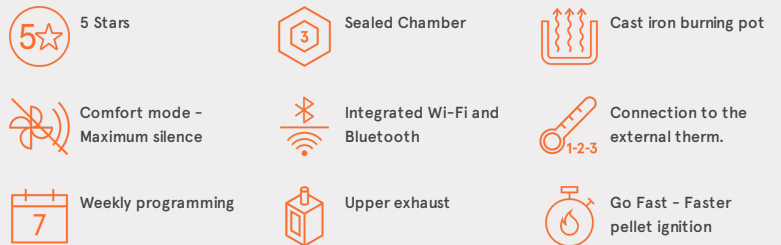

AVAILABLE FINISHES

7024005		Steel White	EAN 8053859020585
7024006		Steel Red Bordeaux	EAN 8053859020592
7024007		Steel Anthracite	EAN 8053859020608

OPTIONAL

5021001	20° CURVE KIT SMOKE	EAN 8053859013334
5024001	UPPER EXHAUST	EAN 8053859020189
5021002	"T" UPPER EXHAUST-KIT	EAN 8053859013341

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	117	60
	Volume (m ³)	0,56	
	Gross weight (kg)	75	
	Net weight (kg)	65	

STORAGE

	N° (max)
	2
MAX 2	
1	

TRANSPORT

66 pz