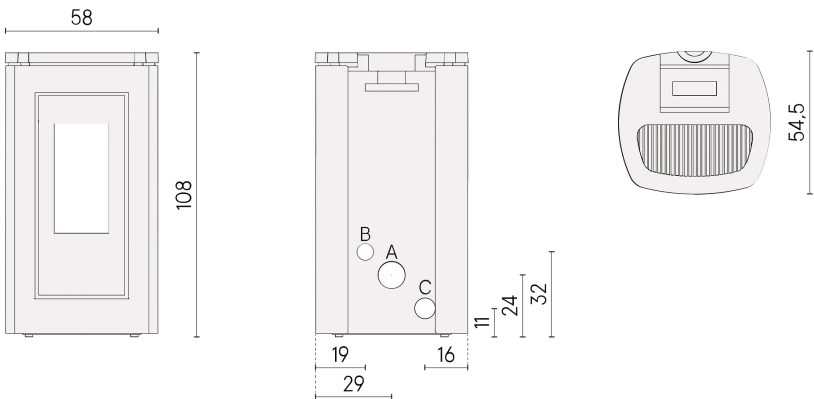




Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 – 10,5
Introduced thermal power (at max)	kW	12,0
Seasonal energy efficiency	ηs [%]	84
Useful efficiency (at min-at max)	%	90,0 – 88,0
Heating surface (at min-at max)	m²	31,1 – 108,9
CO ₂ (min-max)	%	6,3 – 11,4
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	230 – 159
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	5– 5
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	130 – 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 – 15
Combustible Pellet	mm	ø6 L3÷40
Hopper capacity	kg	20
Hourly consumption (at min-at max)	kg/h	0,70 – 2,50
Autonomy (at min-at max)	h	29 – 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption (at max)	W	340
Operating electrical absorption (at max)	W	120
Chimney flue depression (at min-at max)	Pa	2 – 12
Mass of smoke (at min-at max)	g/sec	4,0 – 8,0
Exhaust fumes temperature (at min-at max)	°C	114 – 235
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	80
Ductable up to	m	6

PLUS

 Concentric flue kit (optional)	 Sealed Chamber	 Cast iron burning pot
 Cast iron inner	 Duction with 1 independent motor	 Comfort mode - Maximum silence
 Integrated Wi-Fi and Bluetooth	 Remote control (optional)	 Connection to the external therm.

AVAILABLE FINISHES

7024044		Steel Anthracite	EAN 8053859021087
7024045		Steel Titanium	EAN 8053859021094

OPTIONAL

5022002	UPPER EXHAUST + CONCENT KIT	EAN 8053859015543
5024010	REMOTE CONTROL WITH THERMOSTAT	EAN 8053859020943


CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen


EN 14785:2006
CE



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	126	68
	Volume (m³)	0,69	
	Gross weight (kg)	143	
	Net weight (kg)	133	

STORAGE

	N° (max)
	1

TRANSPORT


60 pz