


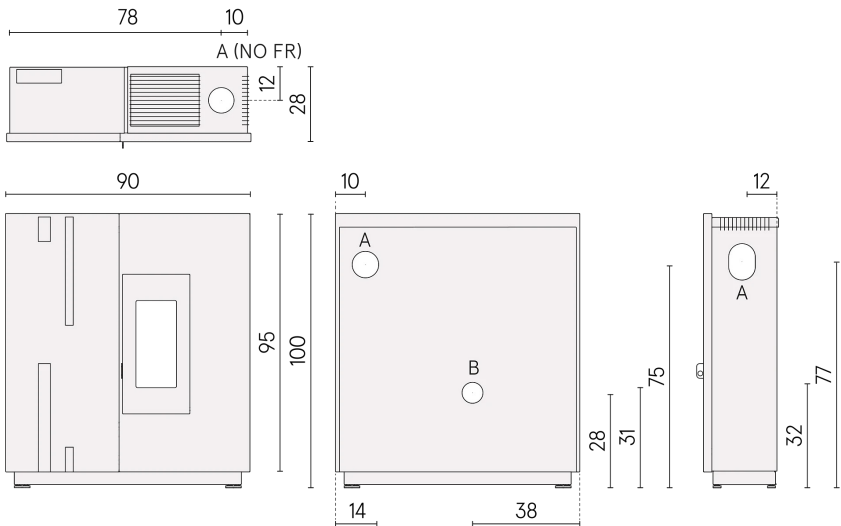

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 6,9
Introduced thermal power (at max)	kW	7,8
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m³	71 - 197
CO ₂ (min-max)	%	6,4 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	295 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	15 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	32
Hourly consumption (at min-at max)	kg/h	0,6 - 1,6
Autonomy (at min-at max)	h	53 - 20
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	374
Operating electrical absorption (at max)	W	67
Chimney flue depression (at min-at max)	Pa	2 - 12
Mass of smoke (at min-at max)	g/sec	3,0 - 4,6
Exhaust fumes temperature (at min-at max)	°C	109 - 177
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS

5 stars D.M. 186	Upper, back and lateral exhaust	Cast iron door
Remote control (optional)	Sealed Chamber	Cast iron burning pot
Connection to the external thermostat	Comfort mode - Maximum silence	

AVAILABLE FINISHES

7025091	Steel Black	EAN 8053859022015
7025092	Steel Titanium	EAN 8053859022022

OPTIONAL

5020001	90° curve kit smoke	EAN 8053859012474
5024010	Remote control with thermostat	EAN 8053859020943
5025001	Black feet	EAN 8053859022213

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022 / EN 16510-2-6:2022

CE

OK BSC

ECO DESIGN 2022

CSTB

D.M. 186 *****

7★

A+

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	117	103
Volume (m³)	0,96	
Gross weight (kg)	87	
Net weight (kg)	75	

STORAGE

N° (max)
1

TRANSPORT

39 pz
